




2025 2035

Size <ligne>	6 ¾ x 8'''
Height <mm>	3.15
Accuracy <per Month>	± 20 sec
Battery Life	3 years

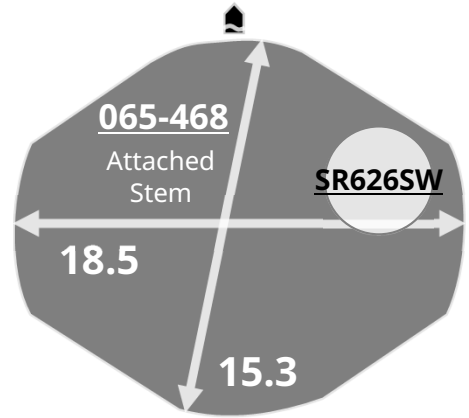


Battery consumption could be minimum by pulling out the stem

Balance Weight <µN · m>	Minute 0.40 Second 0.09 (Except 2025)
----------------------------	--

Featured by Shock Detection

Clearance	
Clearance changes subject to the glass, case structure, and the length of the hand.	

Original Package	1,000 pcs
------------------	-----------

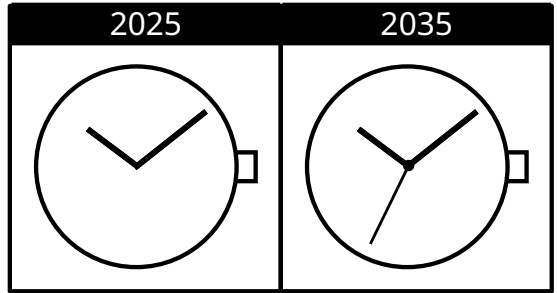


High Hand Ver.
2026
2036
2039
2033
203A

Time measurement

Accuracy


The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

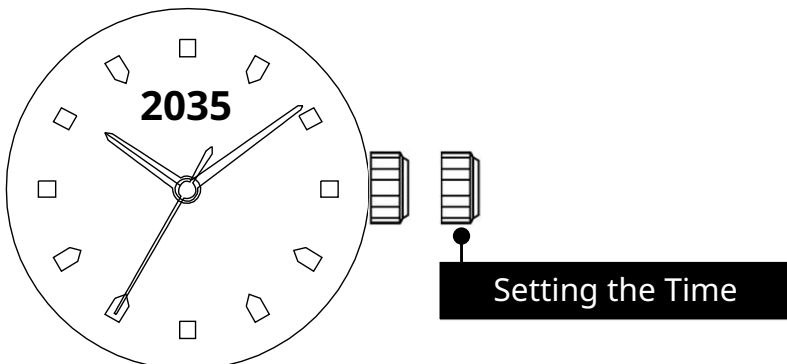



Cal. 2035/2036/2039/2033/203A Instruction manual

A) DISPLAY

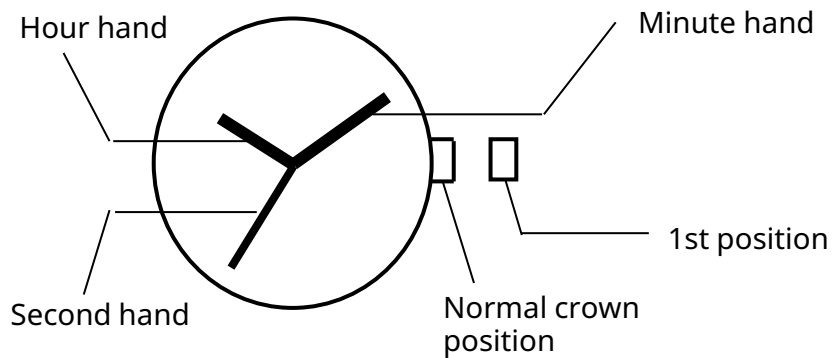

B) SETTING THE TIME

1. Pull the crown out to the 1st position.
2. Turn the crown to set hour and minute hands.
3. When the crown is pushed back to the normal position, second hand begins to run.

These specifications might be changed without prior notice.